

Prosport Inc. 80mm Boost

High-Warning 1 Sound Mode

- 1) When the warning light is flashing, the gauge is in the High-Warning 1 Sound Mode. Then press <UP> or <DOWN> to turn on or off the sound. When the PEAK Blue light is on, the sound is on, vis-à-vis, when the PEAK Blue light is off, the sound is off.
 - 2) When the High Warning 1 value is reached, the buzzer will be operated.
 - 3) To shift to the next setting, press <SET> to enter into the High-Warning 2 Sound Mode or press <MODE> to enter into the Backlight Brightness Mode.
 - 4) The gauge will return to the normal mode after 10-second of no button activity or press <MODE> twice.
- NOTE: When the High-Warning 1 Sound is on, the High-Warning 2 Sound is on simultaneously.


High-Warning 2 Sound Mode

- 1) When the warning light is on, the gauge is in the High-Warning 2 Sound Mode. Then press <UP> or <DOWN> to turn on or off the sound. When the PEAK Blue light is on, the sound is on, vis-à-vis, when the PEAK Blue light is off the sound is off.
- 2) When the High Warning 2 value is reached, the buzzer will be operated.
- 3) To shift to the next setting, press <MODE> to enter into the Backlight Brightness Mode or press <SET> to return to the Opening Sound Mode.
- 4) The gauge will return to the normal mode after 10-second of no button activity or press <MODE> twice.

5. Backlight Brightness Mode

There are six-stage for each daytime and nighttime backlight brightness available for users to select the preferred brightness.

- 1) Press <MODE> three times to enter into the Backlight Brightness Mode from the normal mode. If the gauge is in the Sound Mode, only press <MODE> once to enter into the Backlight Brightness Mode. When the gauge is in the Backlight Brightness Mode, the daytime brightness can be selected.
- 2) When the PEAK and Warning lights are flashing alternately, press <UP> or <DOWN> to select the backlight brightness.
- 3) In order to set the nighttime backlight brightness, the orange wire of the power wire harness should be connected to Dimmer/ 12V switched source (+).
- 4) When Dimmer/ 12V switched source (+) is on, the nighttime brightness can be selected.
- 5) The gauge will return to the normal mode after 10-second of no button activity or press <MODE> once.

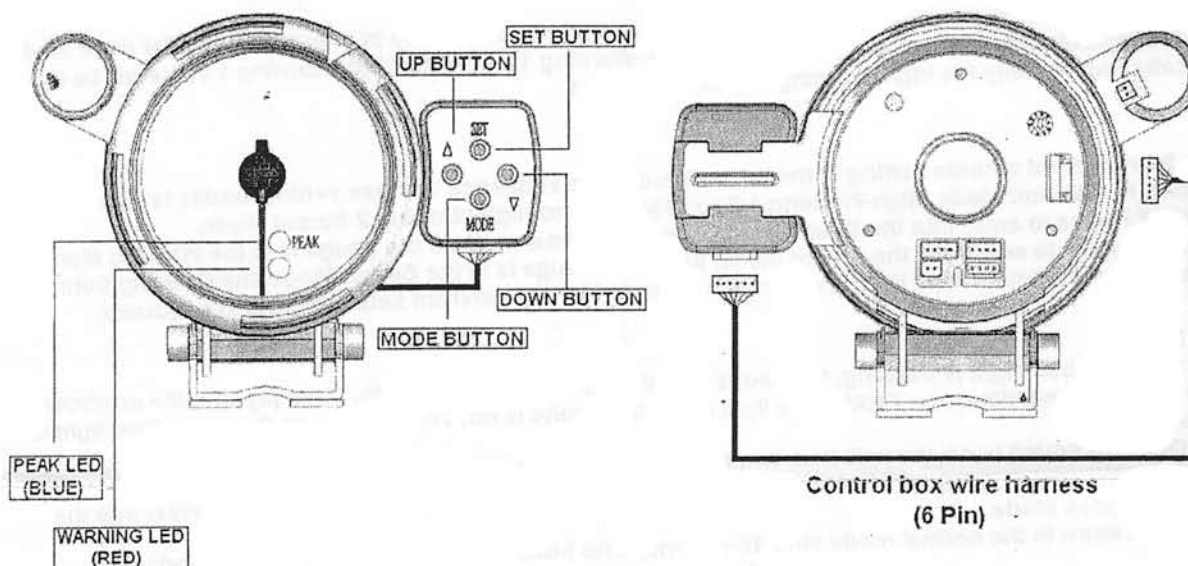

FRONT VIEW

BACK VIEW