

PROSPORT, Inc Halo Series

Swiss Stepper Motor Movement
Installation Instructions
52mm

Exhaust Gas Temp / Volt Gauge


-Power Wire-

Red: 12v Constant Power (power all the time)

Black: Ground

Orange: Headlights or taillights (A power source that only has power when the lights are on. ~Daisy chain~ Power wire This Power wire will connect to the next gauge if installing more than one gauge.)

White: 12v Ignition power (key on)

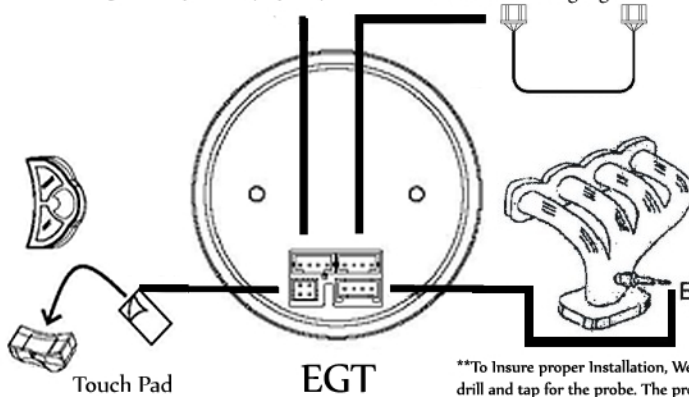


-Power Wire-

Red: 12v Constant Power (power all the time)

Black: Ground

Orange: Headlights or taillights (A power source that only has power when the lights are on. ~Daisy chain~ Power wire This Power wire will connect to the next gauge if installing more than one gauge.)

White: 12v Ignition power (key on)

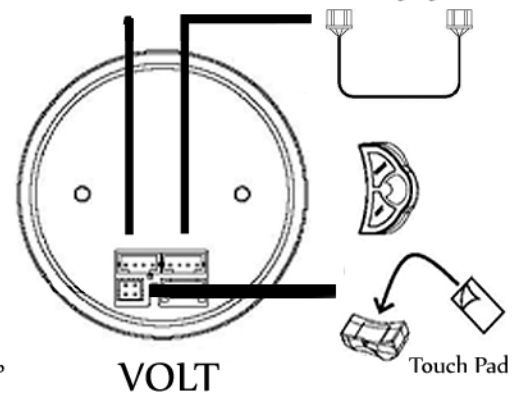

**To Insure proper Installation, We recommend having a Professional shop drill and tap for the probe. The probe needs a 1/8th NPT fitting. The probe is very sensitive, Please check clearance when going into the exhaust pipe or manifold. If Clearance is not checked, the probe will hit the other side and cause the tip to bend/break.

Fuel Pressure Gauge



-Power Wire-

Red: 12v Constant Power (power all the time)

Black: Ground

Orange: Headlights or taillights (A power source that only has power when the lights are on. ~Daisy chain~ Power wire This Power wire will connect to the next gauge if installing more than one gauge.)

White: 12v Ignition power (key on)

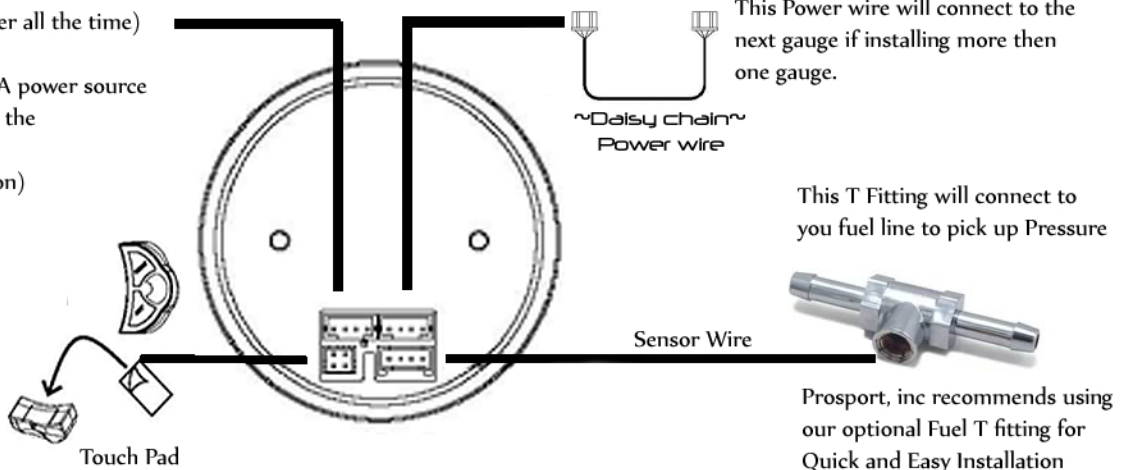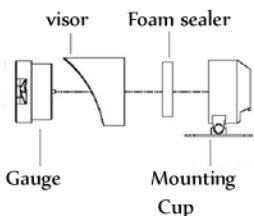

Prosport, inc recommends using our optional Fuel T fitting for Quick and Easy Installation

WWW.PROSPORTGAUGES.COM